

TECHNICAL DATA : SMV 33-1200C

Machine type		SMV 33-1200C
LOAD HANDLING DATA		
Lifting capacity / Load center	kg / mm	33 000 / 1200
Maximum lifting speed, unloaded / at 70% of rated load	m/s	0,27 / 0,25
Maximum lowering speed, unloaded / at rated load	m/s	0,38 / 0,40
DRIVING DATA		
Drive speed forward, unloaded / at rated load	km/h	24 / 23
Drive speed reverse, unloaded / at rated load	km/h	24 / 23
Incline (driving ability) at rated load at 0 km/h / at 2 km/h	%	28 / 22
Towing (power ability) at rated load at 0 km/h / at 2 km/h	kN	214 / 177
SERVICE WEIGHT / AXLE LOADS		
Service weight	kg	42 400
Axle load front, unloaded / at rated load	kg	20 800 / 70 400
Axle load rear, unloaded / at rated load	kg	21 600 / 5 000
ENGINE		
Engine make, model name		Cummins QSB 6.7
Emission approval EU / US		Stage IIIA / Tier 3
Monitoring / emission controlled / CanBus		Yes / yes / yes
Fuel / type of engine		Diesel / 4-stroke CI
Rated power ISO 3046 / max speed	kW / rpm	179 / 2 000
Rated torque ISO 3046 / at speed	Nm / rpm	987 / 1 500
Displacement / No. of cylinders / configuration	L / /	6,7 / 6 / Inline
Fuel consumption, normal operations	L/h	10-13
Alternator, type / power / amperage	W / Amp	AC / 1 960 / 70
Starting battery, voltage / capacity	V / Ah	2 x 12 / 140
TRANSMISSION		
Transmission make, model name		DANA TE-17
Monitoring / reverse protection / CanBus		Yes / yes / yes
Clutch, type		Torque converter
Transmission type / type of shift gear		Softshift – Powershift / Automatic
No. of gears, forward/reverse		3/3
DRIVE AXLE & STEER SYSTEM		
Drive axle make, model name		Kessler D91
Drive axle type		Differential + hub reduction
Service brake, type / affected wheels		Oil cooled Wet Disc Brakes / drive wheels
Parking brake, type / affected wheels		Dry disc brake / spring applied / drive wheels
STEER AXLE & STEER SYSTEM		
Steer axle make / type		Konecranes / double acting single cylinder
Steering system		Hydraulic servo assisted / power steering
WHEELS		
Number of wheels, front+rear / Type (*driven)		4*+2 / pneumatic
Tire pressure front / rear	MPa	1,0 / 1,0
Tire dimensions (Ply rating) front / rear	Inch (No)	16.00 x 25" (PR 28/32) / 16.00 x 25" (PR 28/32)
Rim dimension front / rear	Inch	11.25 x 25" / 11.25 x 25"
HYDRAULIC SYSTEM		
Hydraulic pump make, model name		Parker P2-series
Hydraulic system / pump type		Load sensing system / variable axial piston pump
Power-on-demand / Low energy		Yes / yes
Hydraulic oil pressure mast	MPa	22,5
TANK VOLUMES		
Fuel tank volume	L	371
Hydraulic tank volume	L	346
LIFTING EQUIPMENT		
Lift mast model / mast type / design		Konecranes duplex standard / 2-stage / free visibility
Carriage make / model		Konecranes / Hydraulic integral roller type
Fork make / Model		Konecranes / Roller type
OTHERS		
Noise level (inside Cab / Lm) DIN 45635	dB(A)	67
Noise level (inside Cab/ LpAZ) EN 12053 (EU + EFTA only)	dB(A)	73
Maximum noise level (outside Lwa) 2000/14/EC (EU + EFTA only)	LWA	107
NORMS & STANDARDS		
Stability of Industrial Trucks ISO 22915-2		Yes
Safety of Industrial Trucks EN ISO 3691-1		Yes

http://www.keiyou.net

KONECRANES LIFTTRUCKS AB



Box 103, SE-28523 Markaryd, SWEDEN

Data in this document is based on a standard machine, impact from modifications or customizations are not covered.
Konecranes Lifttrucks reserve the right to alter design and specification without prior notice

www.kclifttrucks.com

Phone: +46-433-733 00

TECHNICAL DATA : SMV 33-1200C

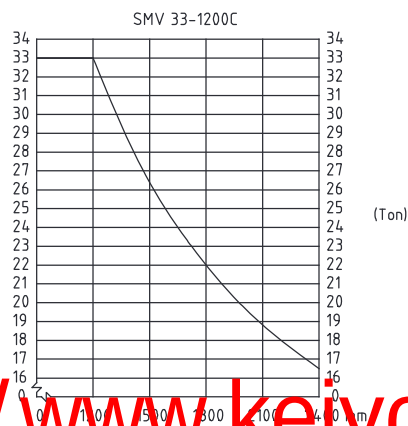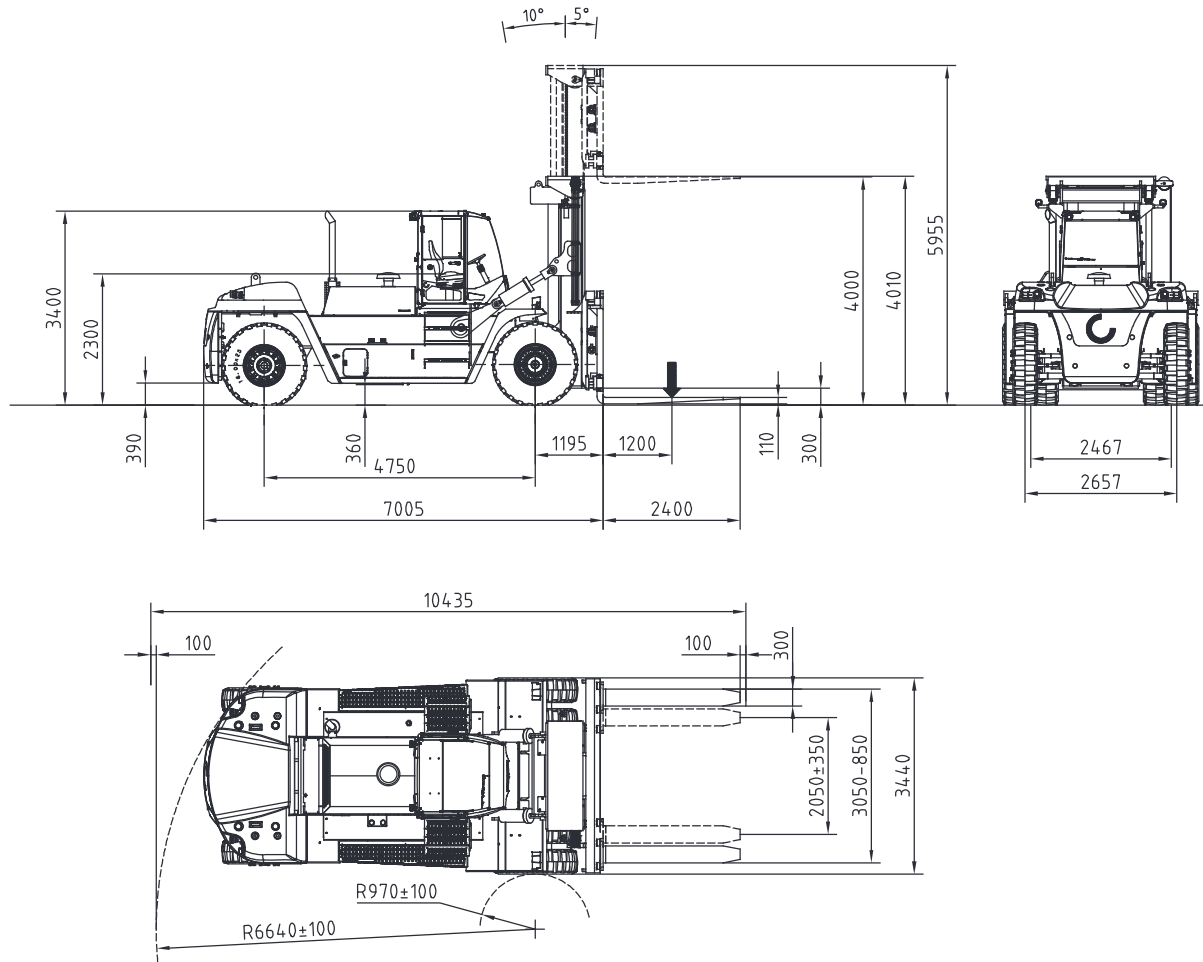

<http://www.keiyou.net>

191117 / 1

KONECRANES LIFTTRUCKS AB
Box 103, SE-28523 Markaryd, SWEDEN

Data in this document is based on a standard machine, impact from modifications or customizations are not covered.
Konecranes Lifttrucks reserve the right to alter design and specification without prior notice

www.klifttrucks.com
Phone: +46-433-733 00